

# SWN-TRH

## Wireless Temperature and Relative Humidity Sensor

Date: \_\_\_\_\_

Quantity: \_\_\_\_\_

Company: \_\_\_\_\_

Project: \_\_\_\_\_

The SWN-TRH is a wireless environmental monitoring sensor that collects temperature and relative humidity data. It is designed to be deployed with the SiteWorx Sense application to deliver powerful reporting, alerts, and actionable intelligence.



### Key Features & Benefits

- Monitor facilities and optimize processes through a real-time stream of actionable environmental data, monitoring, and alerts
- Dramatically reduce installation and reporting time by automating auditable, secure, and unalterable record storage and reporting
- Adjustable collection rates from 1 minute to 1 hour for better data granularity
- Utilize SiteWorx® Sense Alarm capabilities to notify key personnel via email or SMS when your facility deviates from optimal temperature or relative humidity
- Incorporates Lightelligence®, the Digital Lumens core technology that ensures openness, connectivity, scalability, and security

### Facility-Wide Insight

SiteWorx® Sense and SiteWorx-enabled smart sensors empower facility managers to automate and centralize critical environmental and process data, gain insight into previously invisible areas, apply data trends to minimize loss and leakage, identify predictive maintenance opportunities, and implement activity-based costing.

SiteWorx Sense provides immediate access to customizable alerts, advanced controls, and comprehensive, cloud-based reporting accessible via web and mobile applications.

### Instrument for the IIoT

With Digital Lumens intelligent LED luminaires and Digital Lightelligence Agent (DLA) lighting controls, your facility is immediately instrumented with SiteWorx, an easily expandable Industrial IoT solution that enables rapid deployment of additional sensor-based applications that extend beyond lighting to deliver even greater operational insight and create new value streams.

### Quality and Reliability

Digital Lumens products are designed and manufactured to satisfy the highest standards of customers worldwide and deliver performance, reliability, and long life.

## Specifications

### SENSING AND CONTROL

#### Onboard Intelligence

- Temperature and Relative Humidity measurements
- Data logging
- Alerting via SiteWorx Sense

#### Wireless Networking

- IEEE 802.15.4
- 2.4 GHz Band

#### Connected IoT Platform

- SiteWorx Sense

### PERFORMANCE

#### Sample Interval

- 1 to 5 minute (5 minute default)

#### Humidity Range

- 0% to 100%

#### Humidity Accuracy

- ±3%

#### Temperature Range

- -40° to 60°C (-40° to 140°F)

#### Temperature Accuracy

- ±0.5°C (±1.8°F)

### ENVIRONMENTAL

#### Operating Temperature

- -40° to 60°C (-40° to 140°F)

#### Operating Humidity

- 0% to 100%

### PHYSICAL

#### Enclosure

- PC/PBT Plastic

#### Dimensions (H x W x D)

- 88 x 54 x 28 mm (3.5 x 2.1 x 1.1 inches)

#### Weight

- 222 g (7.8 oz)

#### Mounting Hole Diameter

- 5.3 mm (0.21 inch)

#### Mounting Hole Spacing

- (2x) centerline; 78 mm (3.1 inches) apart

#### Battery Type

- (2x) LI-CR123A

#### Battery Life

- 5-Years

### WARRANTY

- 5-Year Limited

### CERTIFICATIONS & SAFETY

#### Approbations

- FCC Part 15 Class B, CE, NSF Splash Zone

#### Environmental Suitability

- IP65




## Ordering Information

#### Part Number

SWN-TRH-GP

## Dimensions

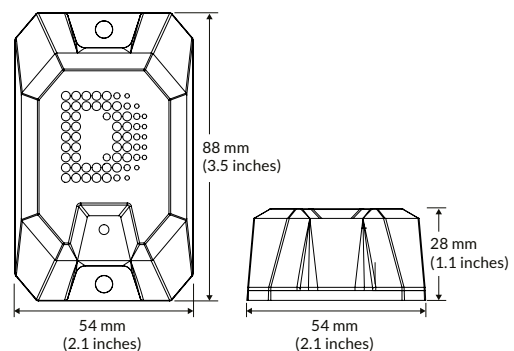

Copyright © 2022 Digital Lumens, Incorporated. All rights reserved. Digital Lumens, the Digital Lumens logo, We Generate Facility Wellness, SiteWorx, LightRules, Lightelligence, Encelium, the Encelium logo, Polaris, GreenBus and any other trademark, service mark, or tradename (collectively "the Marks") are either trademarks or registered trademarks of Digital Lumens, Inc. in the United States and/or other countries, or remain the property of their respective owners that have granted Digital Lumens, Inc. the right and license to use such Marks and/or are used herein as nominative fair use. Due to continuous improvements and innovations, specifications may change without notice.

DOC-004009-00 Rev E 01-22

